

Modelo **BP-1022**


Para Plataformas de hasta **35x35cm**

CELDAS DE CARGA Single Point



DE ALUMINIO

DIMENSIONES EN mm.

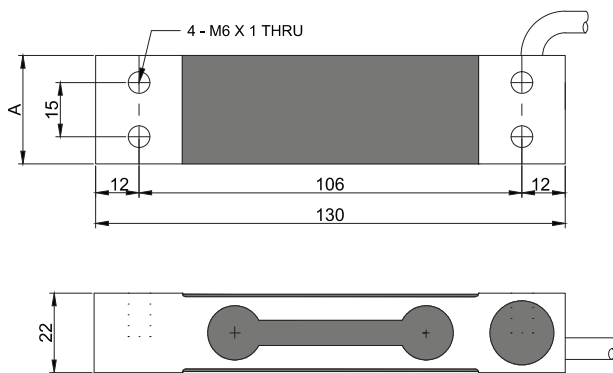

CAPACIDAD	A
10 a 30 kg	30
60 kg	40

Rated Capacities	
Rated Output	2.0 mV/V $\pm$ 10%
Zero Balance	$\pm$ 0.0200 mV/V
Accuracy class	OIML C3
Max No.of loadcell interval(nmax)	3000
Min No.of loadcell interval(Vmin)	E _{max} /7000
Non-linearity	0.017 %R.O.
Hysteresis	0.017 %R.O.
Repeatability	0.017 %R.O.
30mins Creep	0.017 %R.O.
30mins Return	0.017 %R.O.
Safe Overload	150 %R.O.
Ultimate Overload	200 %R.O.
Temperature Effect On Output	0.0015 %R.O./°C
Temperature Effect On Zero	0.002 %R.O./°C
Input Impedance	410 $\pm$ 15 Ω
Output Impedance	350 $\pm$ 5 Ω
Insulation Impedance	$\geq$ 5000 M Ω /(50VDC)
Recommended Excitation	5-12 VDC
Maximum Excitation	15 VDC
Operating Temperature Range	-20~60 °C
Construction	Aluminum Alloy
Protection Class	IP66 / IP67
Cable	ϕ 4 $\times$ 0.5m
Recommended Platform Size	350 $\times$ 400 mm
Mode of Connection	Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)

E SPECIFICACIONES

- Celda de carga tipo Single Point de aluminio
- Selladas con protección IP66
- 2.5m de cable de señal
- De 22mm de altura para plataformas de hasta 35x35cm.
- Intercambiable con: TEDEA 1022, HBM PW6, Rice Lake RL1521A y Transcell FAK.

C CARACTERÍSTICAS

- 15, 30 y 60 kg.
- Otras capacidades sobre pedido.

básculas **PRECICELL** s.a. de c.v.

Lago Mayrán No. 107 Col. Lagos C.P. 38060 Celaya,
Guanajuato, México **Tel.** 461-615-3435 **WhatsApp.** 461-346-8648
contacto@basculasprecicell.com

