


Single Point



Maximum platform: 24"X24"


Capacities

150kg, 200kg, 250kg, 300kg, 500kg, 635kg, 1000kg

Features

- Single Point Load Cell
- Easy to Install
- Stable & Reliable
- Senior Aluminum
- Fit for Floor scales, Tank weighing, Bin and hopper scales, etc.

Schematic

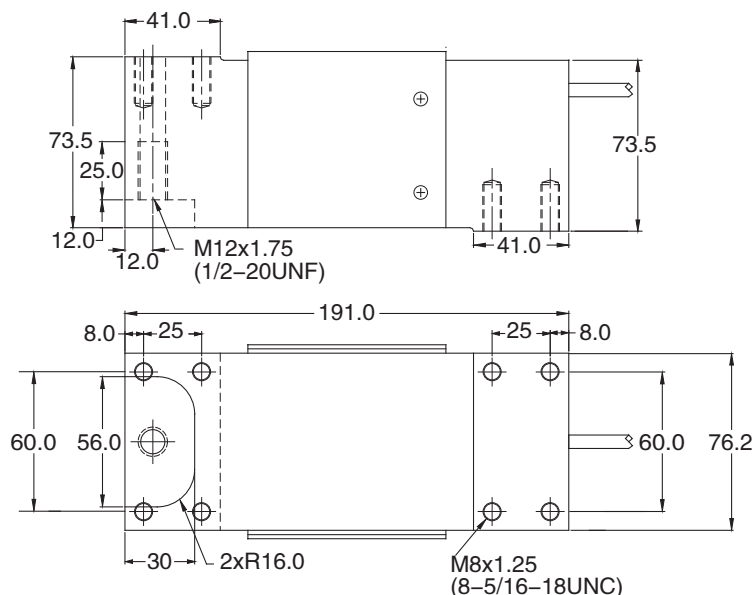

Specifications

Rated Output	2.0mV/V $\pm$ 10%	Safe Temp. Range	-10°C to + 70°C
Zero Balance	$\pm$ 3% of rated output	Temp. Compensated	-10°C to + 40°C
Creep after 20 minutes	$\pm$ 0.03% of rated output	Safe Overload	150%
Nonlinearity	$\pm$ 0.03% of rated output	Input Impedance	410 ohm $\pm$ 20 ohm
Hysteresis	$\pm$ 0.03% of rated output	Output Impedance	350 ohm $\pm$ 5 ohm
Repeatability	$\pm$ 0.03% of rated output	Insulation Resistance	$\geq$ 5000 M ohm(50V DC)
Temp. effect on output	0.002% of applied output/°C	Rated Excitation	10V DC/AC
Temp. effect on zero	0.002% of rated output/°C	Maximum Excitation	15V DC/AC
Cable Length	20feet	Wire Material	Red(+E) Black(-E) White(-S) Green(+S)